


CODE EHF 250W

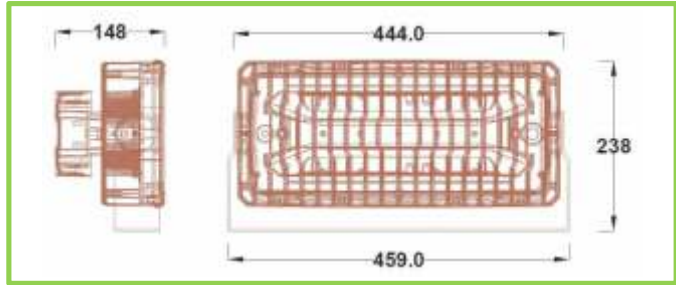

LUMINAIRE SPECIFICATION

| | |
|------------------|--------------------------|
| MAKE | eAge Electronics Pvt Ltd |
| DESCRIPTION | FLOOD LIGHT EHF 250W |
| LUMEN | 32500LM |
| FIXED | YES |
| ADJUSTABLE ANGLE | NO |
| DIFFUSER | LENS |
| PROTECTION | IP66 |
| GLASS IK RATING | IK08 |

LAMP

| | |
|-------------------|------------------------|
| TECHNOLOGY | LED |
| MAKE | SAMSUNG / OSRAM / CREE |
| WATTAGE (W) | 250W |
| CRI | ≥80 |
| CCT | 3000K/4000K/5700K |
| BEAM DISTRIBUTION | 10° / 30° / 60° / 120° |
| LAMP LIFE | 100 000 h, L70 B50 |

LUMINAIRE DIMENSIONS

| | |
|------------------|--------|
| LUMINAIRE LEGTH | 459 MM |
| LUMINAIRE HEIGHT | 238 MM |
| LUMINAIRE WIDTH | 148 MM |

DRIVER

| | |
|-----------------------|----------------------|
| MAKE | SOSEN / MEANWELL |
| POWER SUPPLY | INBUILT LED DRIVER |
| CONTROL | ANALOG |
| DIMMABLE DRIVER | AVAILABLE ON REQUEST |
| DIMMING PROTOCOLS | 1-10V/ Dali |
| INPUT-VOLTAGE | 100-240V AC |
| POWER FACTOR (PF) | >0.93 |
| THD | ≤ 20% |
| DRIVER IP PROTECTION | IP66 |
| OPERATING FREQUENCY | 0/50-60Hz |
| OPERATING TEMPERATURE | -30~50 Dgree C |

SPECIAL FEATURES

LUMINAIRE HOUSING

| | |
|----------|-------------|
| MATERIAL | ALUMINIUM |
| FINISH | WHITE/BLACK |

| | |
|----------------------|-----|
| HONEYCOMB LOUVER | NA |
| MOUNTING ACCESSORIES | YES |

ACCESSORIES

SPECIAL REQUIRMENTS

