




CODE GLA 1230

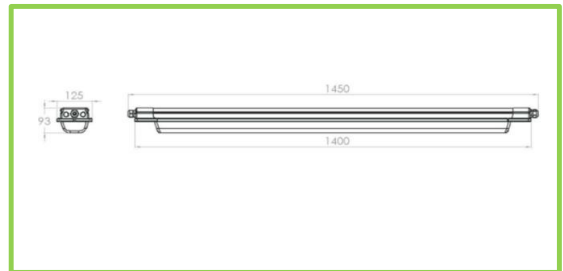

LUMINAIRE SPECIFICATION

MAKE	<u>eAge Electronics Pvt Ltd</u>
DESCRIPTION	LINEAR LIGHT GLA 1230
LUMEN	3040LM
FIXED	YES
ADJUSTABLE ANGLE	NO
DIFFUSER	YES
PROTECTION	IP65
GLASS IK RATING	IK07

LAMP

TECHNOLOGY	LED
MAKE	SAMSUNG
WATTAGE (W)	19W
CRI	≥90
CCT	3000K/4000K/5700K
LAMP LIFE	100 000 h, L70 B50
BEAM DISTRIBUTION	WIDE

LUMINAIRE DIMENSIONS

LUMINAIRE LEGTH	1450 MM
LUMINAIRE HEIGHT	93 MM
LUMINAIRE WIDTH	125 MM

DRIVER

MAKE	HELVAR
POWER SUPPLY	INBUILT LED DRIVER
CONTROL	ANALOG
DIMMABLE DRIVER	DIMMABLE/NON-DIMMABLE
DIMMING PROTOCOLS	DALI
INPUT-VOLTAGE	220-240V AC
POWER FACTOR (PF)	>0.93
THD	≤ 10%
DRIVER IP PROTECTION	IP20
OPERATING FREQUENCY	0/50-60Hz
OPERATING TEMPERATURE	-20~40 Degree C



SPECIAL FEATURES

LUMINAIRE HOUSING


MATERIAL	EXTRUDED ALUMINIUM
FINISH	WHITE/BLACK

HONEYCOMB LOUVER	NA
MOUNTING ACCESSORIES	YES

ACCESSORIES



SPECIAL REQUIRMENTS

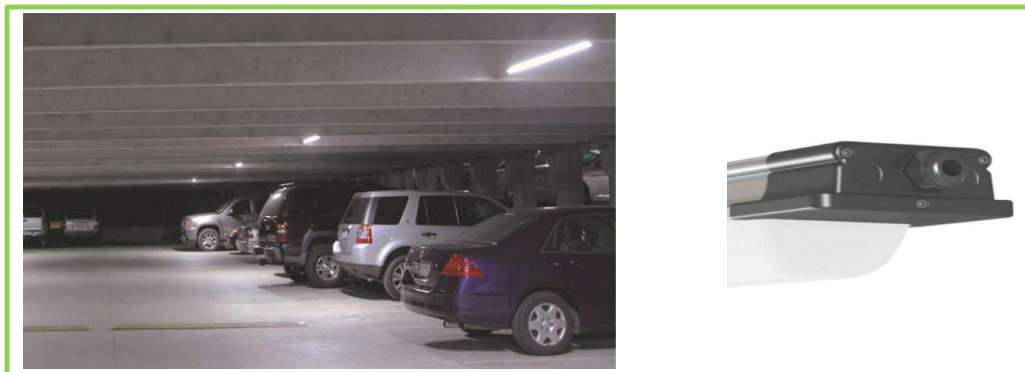

eAge Electronics Pvt Ltd

285, Udyog Vihar, Phase 6, Sec. 37, Gurugram, Haryana

Ph -: 0124-4205127/28. Mob : +919599951488, E-mail : upender.g@eageelectronics.com

